


1. Open your web browser and navigate to the URL;

2.

**http://IPAddressOfTeliannDevice:8763**

Enter the username and password

3. Configure SIP settings according to the image below;

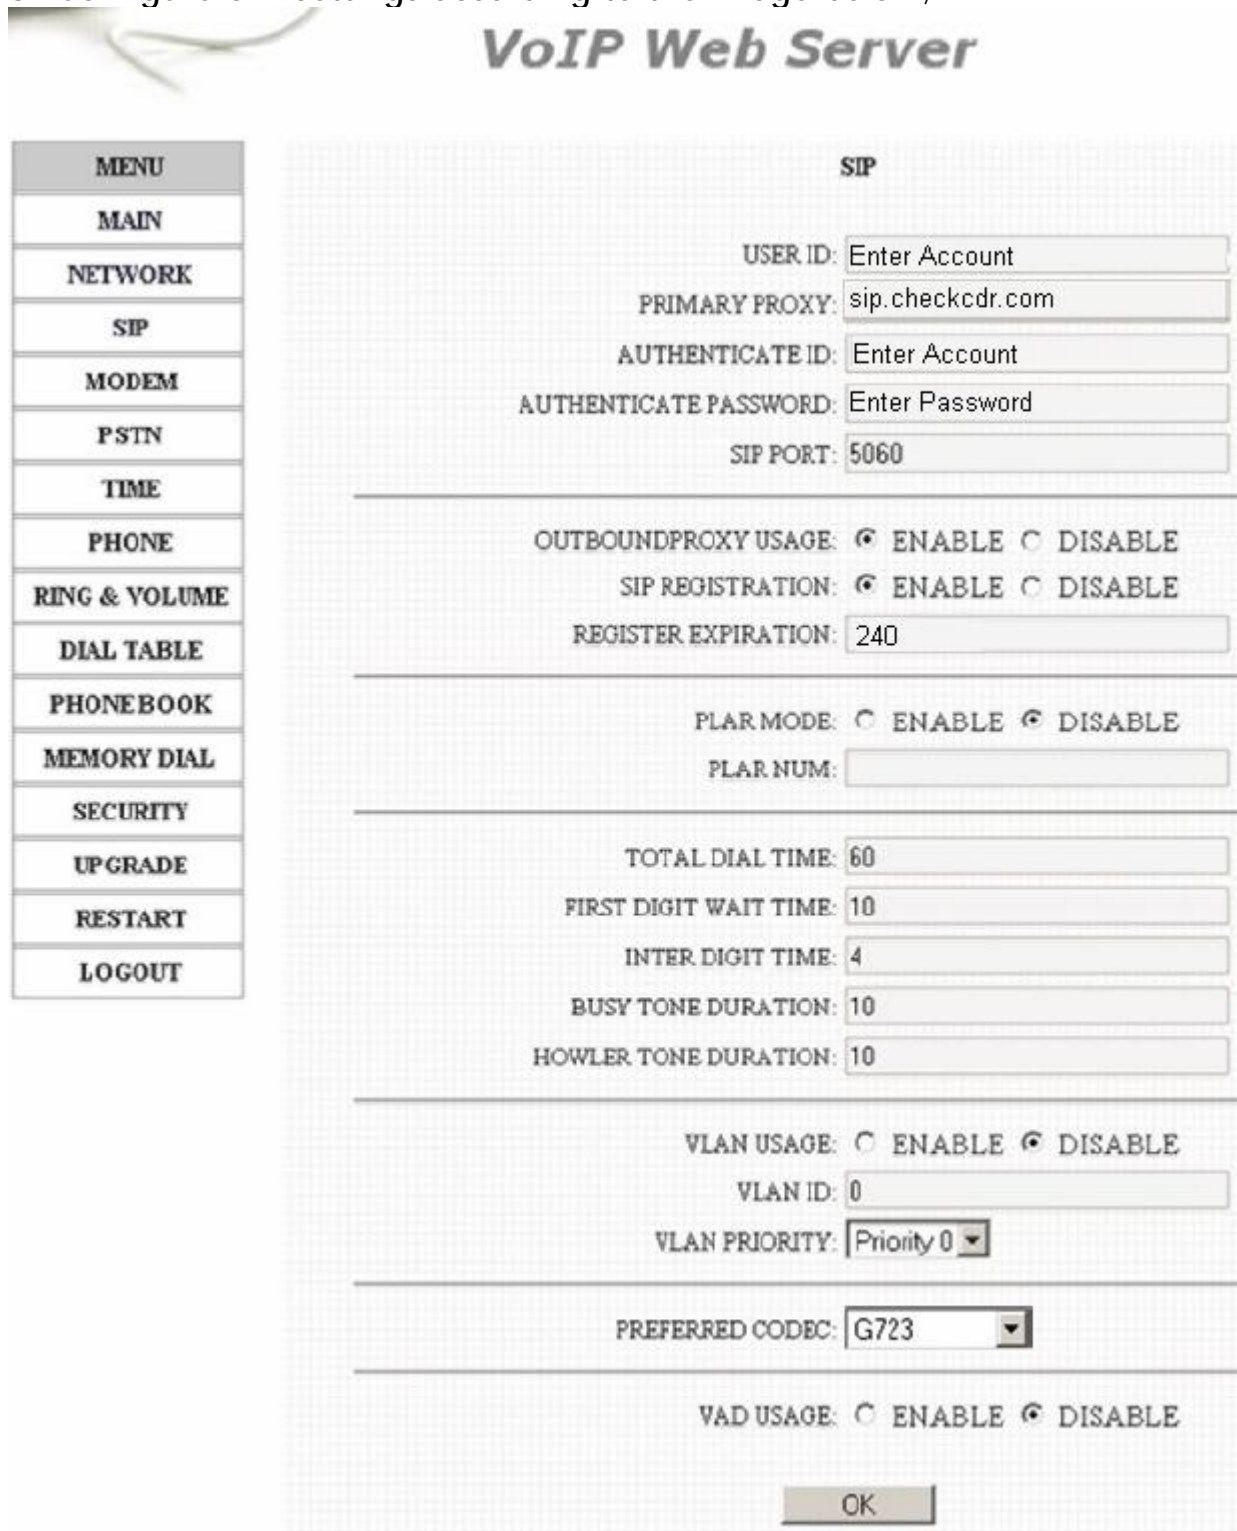

**VoIP Web Server**

MENU	SIP
MAIN	
NETWORK	
SIP	USER ID: <input type="text" value="Enter Account"/> PRIMARY PROXY: <input type="text" value="sip.checkcdr.com"/> AUTHENTICATE ID: <input type="text" value="Enter Account"/> AUTHENTICATE PASSWORD: <input type="text" value="Enter Password"/> SIP PORT: <input type="text" value="5060"/>
MODEM	
PSTN	
TIME	
PHONE	OUTBOUNDPROXY USAGE: <input checked="" type="radio"/> ENABLE <input type="radio"/> DISABLE SIP REGISTRATION: <input checked="" type="radio"/> ENABLE <input type="radio"/> DISABLE REGISTER EXPIRATION: <input type="text" value="240"/>
RING & VOLUME	
DIAL TABLE	
PHONEBOOK	PLAR MODE: <input type="radio"/> ENABLE <input checked="" type="radio"/> DISABLE PLAR NUM: <input type="text"/>
MEMORY DIAL	
SECURITY	
UPGRADE	TOTAL DIAL TIME: <input type="text" value="60"/> FIRST DIGIT WAIT TIME: <input type="text" value="10"/> INTER DIGIT TIME: <input type="text" value="4"/> BUSY TONE DURATION: <input type="text" value="10"/> HOWLER TONE DURATION: <input type="text" value="10"/>
RESTART	
LOGOUT	VLAN USAGE: <input type="radio"/> ENABLE <input checked="" type="radio"/> DISABLE VLAN ID: <input type="text" value="0"/> VLAN PRIORITY: <input type="text" value="Priority 0"/>
	PREFERRED CODEC: <input type="text" value="G723"/>
	VAD USAGE: <input type="radio"/> ENABLE <input checked="" type="radio"/> DISABLE
	<input type="button" value="OK"/>

Enter the following value for OutBoundProxy: [obproxy.checkcdr.com:7899](http://obproxy.checkcdr.com:7899)